

MALAHIDE



Trent

SPECIFICATIONS

MALAHIDE


Product Type	LOOP
Fiber Composition	100% Nylon (Polyamide 6)
Dye Method	Solution Dyed
Pile Weight	600 g/m ²
Number of Tufts	218040/m ²
Machine Gauge	1/12"
Primary Backing	Non-Woven
Secondary Backing	StableShield -100% Vinyl
Tile Size	25 cm x 100 cm (9.8" x 39.2")
Pile Height	4.5 mm
Total Tile Height	7.5 mm
Pile Treatment	INVISTA Anti-Soil Treatment, Anti-Microbial (Optional)
Recommended Installation	Quarter Turn, Herringbone, Ashlar, Sei Ashlar or Random Plank

PERFORMANCE SPECIFICATION

MALAHIDE

Wear Classification	Heavy Contract	
VOC Emission	ASTM D5116-06	<0.5 mg/m ² /hour (CRI GLP)
Flammability	ASTM D-2859//FF 1-70//16CFR 1630	Pass 8/8
Critical Radiant Flux	ASTM E648-08	Class 1
Static Propensity	ISO 6356	0.2 kV
Color Fastness	AATCC/16	5/5 on Grey Scale
Thermal Resistance	ISO 8302	.04m ² K/W
Impact Sound Insulation	ISO 140-8	ΔL _w 23dB
Sound Absorption Level	EN ISO 11654	α _w : 0.15(H)
Soiling Propensity	ASTM D 6540-00	4
Dimensional Stability	EN 986	< 0.20%
Castor Chair Test	DIN 54324	R ≥ 2.4
Smoke Density	EN ISO 9239-1:2002	<450

The above information is subject to modification for the benefit of further improvement. Manufacturing tolerance: ±5%

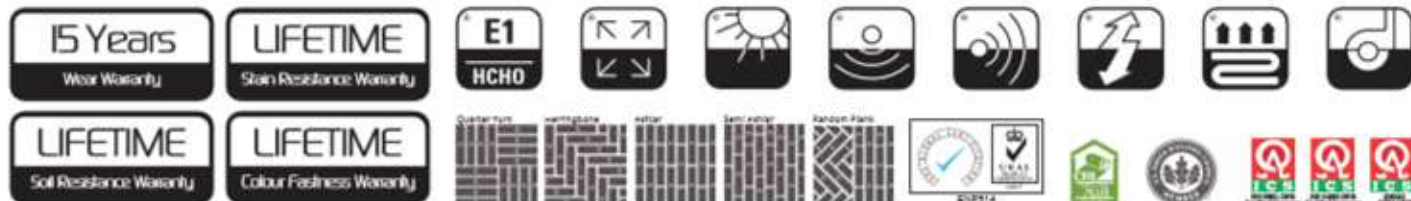

COLOURLINE



Trent

MALAHIDE

645



6645

647



6647

649



6649

658



6658

673



6673

675



6675

676



6676

677



6677



HOW TO INSTALL




MALAHIDE




Trent


QUARTER TURN




HERRINGBONE



ASHLAR



SEMI ASHLAR



RANDOM PLANK

