

SHANNON

Product Type	LOOP
Fiber Composition	100% Nylon (Polyamide 6)
Dye Method	Solution Dyed
Pile Weight	520 g/m ² (15.5 oz/yd ²)
Number of Tufts	193060/m ²
Machine Gauge	1/10"
Primary Backing	Non-Woven
Secondary Backing	StableShield-100% Vinyl
Tile Size	50 cm x 50 cm (19.6" x 19.6")
Pile Height	3.5 mm
Total Tile Height	6.5 mm
Pile Treatment	UV Treated Yarn & Walk Of Fame
Recommended Installation	Quarter Turn or Brick



WALK
OF FAME

Giving your carpets a boost of soil-resisting properties with Walk of Fame. An anti-soiling treatment that increases the lifespan of your carpet. Technology meets practicality with this dirt-repelling treatment.




Trent

SPECIFICATIONS

PERFORMANCE SPECIFICATION

SHANNON

WEAR CLASSIFICATION	HEAVY CONTRACT	
VOC EMISSION	ASTM D5116-06	<0.5 mg/m ² /hour (CRI GLP)
FLAMMABILITY	ASTM D-2859//FF 1-70//16CFR 1630	Pass 8/8
CRITICAL RADIANT FLUX	ASTM E648-08	Class 1
STATIC PROPENSITY	ISO 6356	0.2 kV
COLOR FASTNESS	AATCC/16	5/5 on Grey Scale
THERMAL RESISTANCE	ISO 8302	.04m ² K/W
IMPACT SOUND INSULATION	ISO 140-8	ΔLw 23dB
SOUND ABSORPTION LEVEL	EN ISO 11654	αw: 0.15(H)
SOILING PROPENSITY	ASTM D 6540-00	4
DIMENSIONAL STABILITY	EN 986	< 0.20%
CASTOR CHAIR TEST	DIN 54324	R ≥ 2.4
SMOKE DENSITY	EN ISO 9239-1:2002	<450

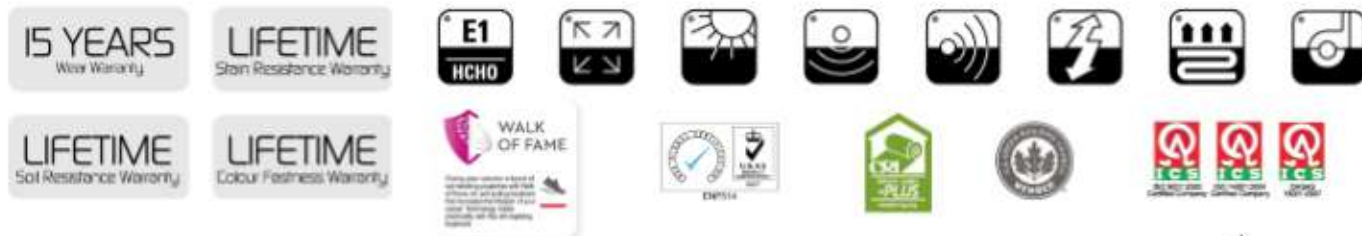

- Shading or Pile reversal is nature of cut pile carpet and it is not manufacturing defect
- Color may slightly vary from one dye lot to another dye lot
- Total weight of the product can have a normal variation of ± 5%
- We reserve to amend the above specification without prior notice due variables in raw material supplies

