



Trent

SHANNON



SHANNON

Product Type	LOOP
Fiber Composition	100% Nylon (Polyamide 6)
Dye Method	Solution Dyed
Pile Weight	520 g/m ² (15.5 oz/yd ²)
Number of Tufts	193060/m ²
Machine Gauge	1/10"
Primary Backing	Non-Woven
Secondary Backing	StableShield-100% Vinyl
Tile Size	50 cm x 50 cm (19.6" x 19.6")
Pile Height	3.5 mm
Total Tile Height	6.5 mm
Pile Treatment	UV Treated Yarn & Walk Of Fame
Recommended Installation	Quarter Turn or Brick



WALK
OF FAME

Giving your carpets a boost of soil-resisting properties with Walk of Fame. An anti-soiling treatment that increases the lifespan of your carpet. Technology meets practicality with this dirt-repelling treatment.




Trent

SPECIFICATIONS

PERFORMANCE SPECIFICATION

SHANNON

WEAR CLASSIFICATION	HEAVY CONTRACT	
VOC EMISSION	ASTM D5116-06	<0.5 mg/m ² /hour (CRI GLP)
FLAMMABILITY	ASTM D-2859//FF 1-70//16CFR 1630	Pass 8/8
CRITICAL RADIANT FLUX	ASTM E648-08	Class 1
STATIC PROPENSITY	ISO 6356	0.2 kV
COLOR FASTNESS	AATCC/16	5/5 on Grey Scale
THERMAL RESISTANCE	ISO 8302	.04m ² K/W
IMPACT SOUND INSULATION	ISO 140-8	ΔLw 23dB
SOUND ABSORPTION LEVEL	EN ISO 11654	αw: 0.15(H)
SOILING PROPENSITY	ASTM D 6540-00	4
DIMENSIONAL STABILITY	EN 986	< 0.20%
CASTOR CHAIR TEST	DIN 54324	R ≥ 2.4
SMOKE DENSITY	EN ISO 9239-1:2002	<450

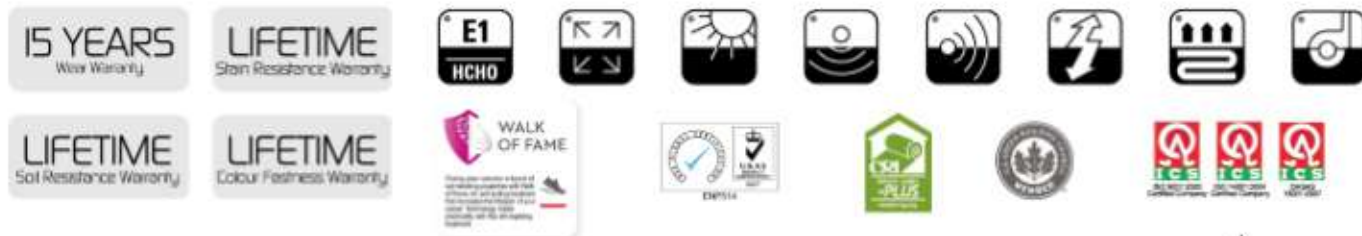

- Shading or Pile reversal is nature of cut pile carpet and it is not manufacturing defect
- Color may slightly vary from one dye lot to another dye lot
- Total weight of the product can have a normal variation of ± 5%
- We reserve to amend the above specification without prior notice due variables in raw material supplies





SHANNON

COLOURLINE

579



578



548



576



558



556



577



571



547



546



557



555




Trent

SHANNON

HOW TO INSTALL

QUARTER TURN



BRICK

